


**Film Data Sheet**  
**T-579**  
**4 x 5 Pack Film**

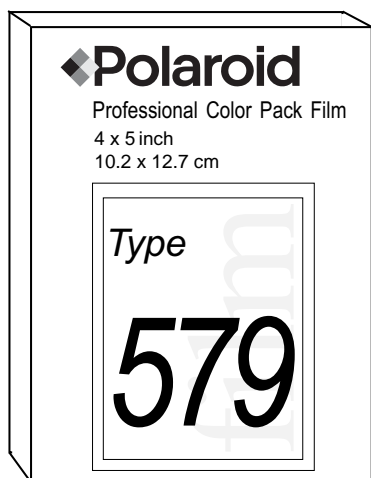

**Film Speed**

ISO 100/DIN 21

**Format**

4 x 5 in. (10.2 x 12.7 cm)  
Pack Film

**Image Area**

3<sup>1</sup>/<sub>2</sub> x 4<sup>5</sup>/<sub>8</sub> in. (9 x 11.7 cm)

**Finish**

Glossy

**Exposures per Unit**

10 exposures per pack

**Development Time**

90 seconds at  
70°–95°F (21°–35°C)

**Caution**

This film uses a small amount of caustic paste. If any paste appears, avoid contact with skin, eyes and mouth and keep away from children and animals. **If you get some paste on your skin, wipe it off immediately, then wash with water to avoid an alkali burn.** If eye contact occurs, quickly wash the area with plenty of water and see a doctor. Keep discarded materials away from children, animals, clothing and furniture.

**Limited Warranty**

See information on the film box.

**Description**

Medium-speed, medium-contrast, medium-grain, daylight and electronic flash balanced (5500°K) color print film. This film features accurate colors and bright whites; sharp, vibrant, saturated proofs and final art; lower contrast for greater detail when compared to Polaroid Pro 100 film; improved reciprocity characteristics, and fast clearing and drying.

**Key Applications**

- Professional photography (proofing and final art)
- Passport/document photography
- Scientific/industrial photography

**Compatible Hardware**

- Model 550 Film Holder

**Special Instructions**

*Temperature affects the final image:*

Processing at temperatures above 95°F (35°C) or below 55°F (13°C) is NOT recommended. Best results obtained between 65°–85°F (18°–29°C).

*Force-drying prints:*

Allow the print to air-dry for at least thirty (30) seconds before using a forced-hot-air dryer.

*Viewing:*

When evaluating the color balance of a print, use the same light source under which the print is to be viewed as a finished product.

*Laminating prints:*

This film is NOT recommended for use with laminates requiring a wet print to produce a photo-destruct bond.

**Alternative Product**

Use Polacolor 559 for emulsion lift and T-64 Tungsten for tungsten lighting.

**Processing Information**

Temperature °F	Temperature °C	Proc. Time (sec.)	Equivalent Film Speed (ISO/DIN)	Exposure Adjustment
70-95	21-35	90	100/21	None
65-69	18-20	120	100/21	None
61-64	16-17	150	100/21	None
55-60	13-15	180	100/21	None

“Polaroid” and “Polacolor” are trademarks of Polaroid Corporation, Waltham, MA 02451 USA.





